

anyfeed™ SXM200

Universal, programmable parts supply systems



Innovative, highly flexible feeder technology for all robots

- > Maximum availability thanks to automatic error correction
- > Minimal changeover times when changing products
- > Automatic parts emptying at the touch of a button
- > Minimal footprint– anyfeed replaces several conventional feeders
- > Exceptionally gentle parts handling
- > Standardized communication with all models
- > Simple serving thanks to the use of identical servo-electric drives in all models

Application area

Assembly, Inspection technology, Packing/Counting, Machine loading

Ideal for parts:



≤ 45 mm



≤ 0.15 mm



≤ 25 g



5-45 °C



Dry

System requirements: In addition to the selected anyfeed model, the following must be taken into account for a flexible feeding solution: robots with grippers, vision systems (we recommend feedware CX / Cognex In Sight from Flexfactory), lighting, base plate for the construction of all components, robot application for the movement sequence and the data exchange between vision systems.

anyfeed™ feeder systems for robots

anyfeed flexible bulk parts feeders singulate and deliver bulk parts into the pick up zone of an industrial robot. Part flow and reorientation of parts in the feeder is controlled by feedware CX – a Cognex In Sight based vision solution specifically developed and optimized by flexfactory for flexible part feeding applications. The universal bulk parts feeding solution is in operation with over 18 commercially available robot brands.



feedware™ CX-Software solution


It is the ideal and proven solution for turning any anyfeed model and any robot into a complete parts supply system – in next to no time and with the greatest of ease. The Cognex In Sight camera installed above the window identifies correctly oriented parts and transfers the picking coordinates to the robot's control system.

feedware CX continuously monitors the parts in the pick window and sends action commands to the anyfeed telling it to make more parts available for the robot. feedware CX is also responsible for teaching the system to handle new parts, parameterizing feed characteristics, calibrating robot to vision coordinates, and defining pick points and clear grip zones.

flexfactory supplies the full package, including a Cognex In Sight camera with feedware CX preloaded. The company also provides the appropriate lighting and optics and helps customers get the entire solution up and running.



Part description

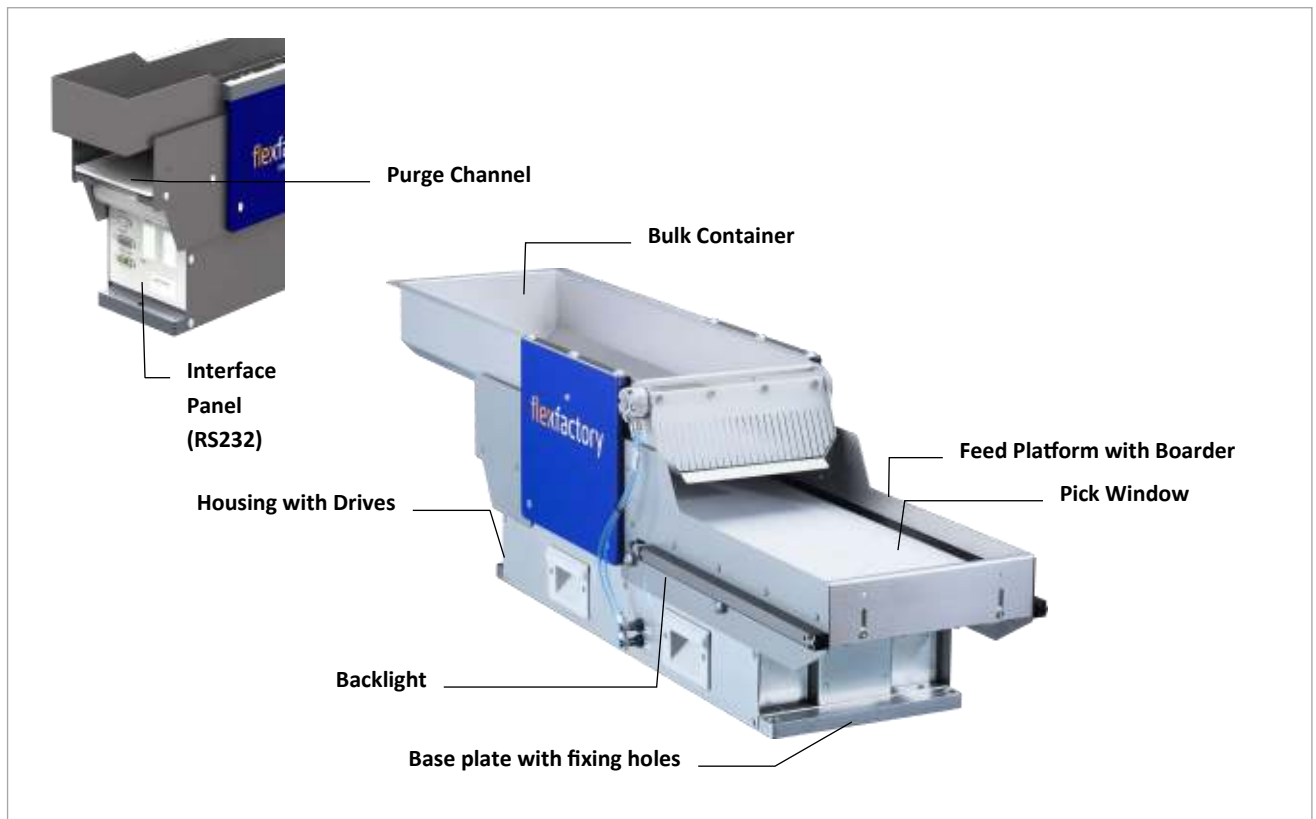

Electrical Connections - anyfeed SXM 200 (IF2011)

Label	Function	Connectingtyp	Pin	Allocation	Cabel
J1	Motor Power	D-Sub-M, 2+5, Male	A1	24VDC in	Nr.1 (red)
			A2	GND	Nr.2 (blue) Shield
J2	RS232	D-Sub 9, Female	2	Tx	D-Sub 9, Male - Female
			3	Rx	
			5	GND	
J4	Aux I/O	D-Sub 15, Female	1	Trigger out	
			4	GND	
			5	GND	
			6	24VDC oLT	
			7	24VDC oLT	
			8	P'ck in	
			9	Flash in	
			14	Error Drive 1	
15	Error Drive 2				



Technical Specifications

Capacity Bulk Container	6l/kg - 8l/kg
Field of Vision (FOV)	230x266 mm
Pick-Up Area	532 cm ² (20x26.6 cm)
Unevenness Pick-Up Area	0.5 mm
Repeat-precision Feederplatform in z	± 0.05 mm
Max. weight on surface (FOV)	500 g
Plate level (parts)	160 mm
Border height	28 mm
Light height of Purge Channel	42 mm
Power Requirements	24 V/ 10 A
Typical consumption	100 W (depeding on operating mode)
Compressed Air	-
Eccentricity Feed Surface	± 3.5 mm Maximum stop from initial position)
Eccentricity Bulk Container	± 2 mm
Interface	RS232 (DSUB9 Female)
Drive	2 brushless servo drives 130W
Temperature	5-45 °C
Humidity	95 % non- condensing
Weight	26kg - 27kg

Standard Materials

Housing with Drives	WN 1.4301
Feeder Platform	WN 1.4301
Border Feeder Platform	WN 1.4301
Bulk Container	WN 1.4301
Feed Surface	POM-C Natur

<p>4x M6 Mounting screws</p> <p>Safety shield</p> <p>Compressed air Tube $\text{Ø}8$</p> <p>Electrical connections LED status indicator</p> <p>6/7kg bulk</p> <p>Minimal mounting length 650</p> <p>Pick window</p> <p>0.5</p> <p>Dimensions: 626, 12, 200, 1068, 630, 16, 30, 159, 189, 113, 38.7, 159, 266, 200, 297, 266</p>	<p>flexfactory[®] reinvert feeding</p>
<p>Bezeichnung</p> <p>anyfeed™ SXM200 6I</p>	<p>9</p>
<p>Artikel-Nr.</p> <p>900-001-163</p>	<p>All dimensions in mm</p>

	<p>All dimensions in mm</p>
<p>Artikel-Nr. 900-001-174</p>	<p>Bezeichnung anyfeed™ SXM200 8l</p>